

เปลี่ยนบ้านให้ SMART แบบไร้สาย

ด้วยการเชื่อมต่อ RisControl เข้ากับอุปกรณ์เครื่องใช้ไฟฟ้าภายในบ้าน สิ่งงานควบคุมระบบแบบไร้สายได้ทันที

Product Specifications

Display	5" 8
Resolution	800x1280
Speaker	W / Ohm 8
Fi-W	GHz 4.2 n/g/b 11.8
System interface	485-R
Protection	Wall Tamper

Dimensions	208 x 129 x 24 mm
Weight	500g
Operating Voltage	13V ±%10
Power consumption	8W
Operating Temperature	-10C° to 55C° (°14 F to 131° F)
Standard	EN50131-3, Grade 3 Environmental Class II, PD 6662:2017

Product Specifications

Item	Value
Input voltage (DC input port)	12VDC – 24VDC
Input voltage (Micro-USB port)	5VDC
Operating current	200mA(max)
Dry contact input (DCT) voltage	5VDC – 24VDC
RTS radio frequency	433.42MHz
Range distance	20m with 2 concrete walls
No of channel	5
No of channel	8
Z-Wave radio frequency	921.4 MHz
Range of distance	20m in indoor
Operating Temperature	0°c to 50°c
Dimension (without cover)	125mm(L) x 88mm(W) x 30mm(H)
Dimension (with cover)	125mm(L) x 105mm(W) x 32mm (H)
Weight	Z-Wave2RTS 138g DCT2RTS 134g
DC power	12-24VDC



โมดูลควบคุมไฟหรี่ MOS Dimmer Module



Product Specifications

Function	MOS Dimmer Module
Frequency range	868.42 MHz
RF protocol	Z-Wave Plus
RF range (open space)	>100m
Power input	AC220V - 240V / 50Hz
Operation temperature	0 - 40°C
Operation humidity	85% RH max
Dimension (mm)	43(W) x 42(D) x 17.5(H)
Weight	34g

โมดูลเปิดปิดไฟ 3-Wire in-Wall On/Off Module




Product Specifications

Function	3-wire in-wall on/off module
Frequency range	921.42MHz
RF protocol	Z-Wave Plus
RF range (open space)	>70m
Power input	AC220V - 240V / 50Hz
Operation temperature	-10 - 40°C
Operation humidity	85% RH max
Dimension (mm)	43(W) x 42(D) x 16.5(H)
Weight	34g

SMART SWITCH Product Specifications



Power Supply	100 - 240V AC ~ 50/60Hz
Power consumption standby	<0,5W
Operational temperature	0 C - 50 C
Power rating	Non reactive load: 500W Led : 150W
Radio protocol	Z-Wave
Dimensions (DxRxC)	95 x 95 x 31,5 mm (square) 121,5 x 80 x 31,5 mm (rectangle)

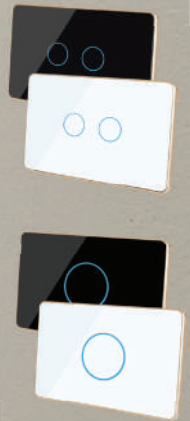

ควบคุมประตูรั้ว SMART MODULE

Product Specifications

Power supply:	100-240V~ 50/60Hz 24-30V
FGS-214 rated current:	6.5A 9.5A total
Supported load types:	resistive
Operating temperature:	0-35°C
Operating humidity:	0-95% RH without condensation
Radio frequency band:	868.0-868.6 MHz (EU) 869.7-870.0 MHz (EU) 915.0-928.0 MHz (AH)
Max. transmit power:	+5dBm (EU)

ควบคุมเครื่องปรับอากาศ Air Conditioning Controller

Product Specifications

Temperature Measurable range	0°C ~ 40°C / 32°F ~ 104°F
Report resolution	0.5 Degree °C / 0.5 Degree °F
Operational temperature	0°C ~ 40°C, non-condensing
Storage Temperature	-10°C ~ 50°C
Powered By USB Power	DC 5V 1A or Alkaline Primary Batteries
AA x 2pcs	
Dimension (L x H x T)	128mm x 78mm x 22mm

